



WWW.EVBGROUP.PL

EVB

POWER DC

50 - 320kW





TYPE

EVB Power DC Electric Vehicle Charging Stations

MODELS / DESIGNATIONS

PWR50-C2, PWR50-C2-C2, PWR50-C2-C2-R, PWR50-CH, PWR50-C2-CH, PWR50-C2-CH-R, PWR60-C2, PWR60-C2-C2, PWR60-C2-C2-R, PWR60-C2-CH, PWR60-C2-CH-R, PWR90-C2, PWR90-C2-C2, PWR90-C2-C2-R, PWR90-C2-CH, PWR90-C2-CH-R, PWR120-C2, PWR120-C2-C2, PWR120-C2-C2-R, PWR120-C2-CH, PWR120-C2-CH-R, PWR150-C2, PWR150-C2-C2, PWR150-C2-C2-R, PWR150-C2-CH, PWR150-C2-CH-R, PWR200-C2, PWR200-C2-C2, PWR200-C2-C2-R, PWR200-C2-CH, PWR200-C2-CH-R, PWR300-C2-C2, PWR300-C2-C2-R, PWR320-C2-C2, PWR320-C2-C2-R.

ADDITIONAL EQUIPMENT

ACTYP2 - 22 kW plug type2, straight cable 4.8 m

TKP - payment card terminal

CCSCHA7M - CCS-2 or CHAdEMO cable extension up to 7 metres

TYP27M - cable extension to type2 up to 7 metres

UP2040 - increase in station capacity from 20 to 40 kW

FA10045506 - free-standing construction with a set of screws non-illuminated

LED2MFRON - LED windscreen illumination - logo/inscription

FB12080108 - concrete slab 1200x800x10

FB405010015 - concrete slab 400x500x1000

SLPI8070000 - safety barrier 800x70 wall mounted

SLPI1207000 - safety barrier 1200x70 floor mounting

SEKR901510 - parking separator black with reflectors 900x150x100

SEDL161412 - parking separator black with reflectors 1670x145x120

GD12M - additional guarantee for a further 12 months beyond 24 months

APPLICATION

Free-standing DC and optional AC fast charging station. Designed for charging cars with a large battery capacity in public and industrial areas.

DESCRIPTION

HOUSING DESIGN:

- ▶ Powder-coated aluminium housing;
- ▶ front made of toughened glass;
- ▶ free-standing;

Free branding and colouring based on individual design.

CONNECTORS AVAILABLE:

- ▶ CCS plug 2 (C2), with cable (Combo-2) Combo T2 with straight cable up to 4.8m;
- ▶ CHAdEMO (CH) plug with straight cable up to 4.8 m;
- ▶ plug type2 (ACTYP2) with straight cable up to 4.8m
- ▶ Type2 socket (ACTYP2G) with locking device.

AVAILABLE POINT CHARGING CAPACITIES:

- ▶ DC: 50/60/90/120/150/200/300/320 kW,
- ▶ AC: 22 kW.

Two or three vehicles simultaneously with dynamic power sharing.

RELEVANT FEATURES:

- ▶ main switch - fuse disconnecter;
- ▶ overvoltage protection;
- ▶ overcurrent protection;
- ▶ residual current protection;
- ▶ emergency stop switch;
- ▶ checking the state of insulation;
- ▶ higher harmonic filter;
- ▶ energy consumption meter at each workstation;
- ▶ heater;
- ▶ forced ventilation system.

CHARGING SIGNALLING:

- ▶ LEDs (RGB) showing the various stages of charging;
- ▶ HD display - 10 inches - charging process parameters.

INTERFACE:

- ▶ buttons;
- ▶ LCD graphic display;
- ▶ RFID card reader in 13.56 MHz standard;
- ▶ payment terminal.

COMMUNICATION PROTOCOL:

- ▶ OCPP 1.6J, OCPP 2.0.

COMMUNICATION:

- ▶ Ethernet;
- ▶ WiFi;
- ▶ GSM, 3G, LTE.

POWER SUPPLY SPECIFICATIONS

Cross section of supply cable [mm ²]	50-240 mm ²
Type of power supply	3xL+N+PE
Network layout	TN-S, TNC-S, TT
Rated switching voltage [V] (+/- 10%)	400
Rated insulation voltage [V]	500/690
Rated frequency [Hz]	50/60
Withstand surge voltage [kV].	8
Rated connection power [kW]	52 - 350
Rated connection current [A]	100- 600
Overvoltage protection	type 2

TECHNICAL PARAMETERS OF THE CHARGING POINTS

Plug type	CCS-2, CHAdeMO, type-2
Maximum charging current [A]	32 - 250, 32-63
Output voltage range	150-1000 VDC, 230/400 VAC
Charging standard	Mode 4, CHAdeMO2, Type 2, IEC 61851, IEC61851-23, IEC 61851-24, ISO 15118, DIN 70121, IEC 61851-1, IEC 62196-2
Communication standard	ISO 15118, DIN 70121, CHAdeMO 1.1
Charging cable length [m]	Up to 4.8
Power factor	0,98
Coupling efficiency [%]	up to 96
Communication protocol	OCPP 1.6J (2.0 ready)
Changing station parameters	Firmware upgrade
Communication	LTE, GSM, ETHERNET, WIFI
Interface	10-inch TFT screen


TECHNICAL SPECIFICATIONS OF THE HOUSING

Dimension (H/W/D) [mm].	2055/756/570
Material	Aluminium, toughened glass
Colours	Any RAL
Protection class	I/II
Protection class IP/IK	54/10
Weight [kg]	60-120
Operating temperature [st.C]	-30 to +55
Moisture content [%]	95
Noise level [dB]	<60
Installation	4xM12

NORMY

EN-61851-1_2011E	Electric vehicle conductive charging system – Part 1: General requirements
EN-61851-22:2002	Electric vehicle conductive charging system - Part 22: AC electric vehicle charging station
EN 61439-1:2011	Low-voltage substations and control gear - Part 1: General rules
EN 61439-3:2012	Low-voltage substations and control gear – Part 3: Distribution board stations intended for use by persons other than the public (DBO)
EN 61439-5:2015-02	Low-voltage substations and control gear – Part 5: Sets for power distribution in public networks
EN 50274:2004	Low-voltage substations and control stations – Protection against electric shock – Protection against unintentional direct contact with hazardous live parts

EN 62208:2006	Empty enclosures for low-voltage substations and control rooms – General requirements
E 05163	Shielded low-voltage substations and switchgear – Test guidelines for arc-discharge conditions resulting from internal short circuits
EN 60695-11-10:2014-02	Fire hazard testing - Part 11-10: Test flames - 50 W flame test methods for horizontal and vertical specimen alignment
EN ISO 14040:2009	Environmental management – Life cycle assessment – Principles and structure
EN ISO 14044:2009	Environmental management – Life cycle assessment – Requirements and guidelines
EN 62196-1:2015-05	Plugs, socket-outlets, vehicle couplers and vehicle inlets – Conductive charging of electric vehicles – Part 1: General requirements
EN 62196-2:2017-06	Plugs, socket-outlets, vehicle couplers and vehicle inlets – Conductive charging of electric vehicles – Part 2: Dimensional compatibility and interchangeability requirements for a.c. plug and socket contact products
EN 62196-3:2015-02	Plugs, socket-outlets, vehicle connectors and vehicle inlets – Conductive charging of electric vehicles – Part 3: Dimensional compatibility and interchangeability requirements for d.c. and a.c./d.c. vehicle connectors with sleeve-and-pin contacts
ISO/IEC 14443	Identification cards - Proximity chips - Proximity cards
ISO/IEC 15693	Identification cards - Proximity chips - Proximity cards
EN 61000-6	Electromagnetic compatibility (EMC) - Part 6-2: Generic standards - Immunity for industrial environments

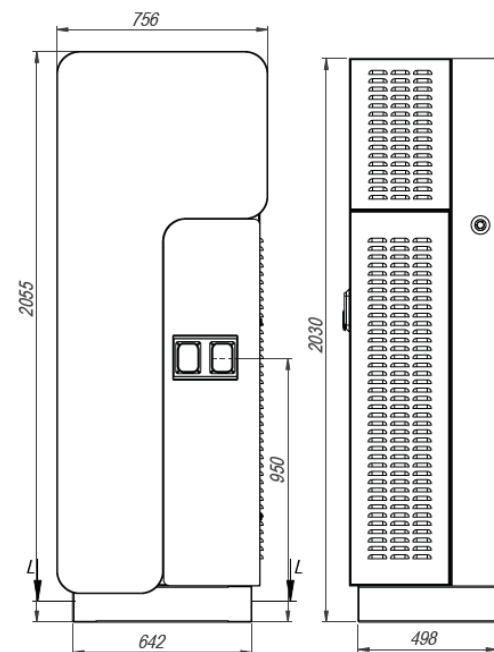



KONTAKT

TELEFON: +48 696 673 646

E-MAIL: OFFICE@EVBGROUP.PL

WWW.EVBGROUP.PL

